

TL-Series

Wood Stoves




HARMAN[®]

BUILT TO A STANDARD, NOT A PRICE

The TL-Series stoves are a practical and efficient option to supplement home heating. Harman FireDome technology delivers even temperatures and long burns for up to 17 hours of heat from each load of wood. Our uncompromising commitment to quality is evident in TL-Series stoves with their clean, powerful performance and innate engineering excellence. Customize your TL with unique finishing options and even a cooking grill.



Features

- Even heat and up to 17-hour burns with FireDome (TL300) and FireDome Plus (TL2.0 and TL2.6) technology
- Extended performance and convenience with front and top loading
- Less-frequent maintenance with large ash pan
- Flexible installation with rear and top vent (TL2.6 only)
- EPA certified 

Options

- Brushed stainless trim kit (leaf trim for TL300, modern trim for TL2.6 and 2.0)
- Brushed stainless air grille (TL2.0 only)
- Ash door inlays
- Blower (TL2.0: 150 CFM; TL2.6: 150 CFM; TL300: 105 CFM)
- Stainless cooking grill
- Outside air adapter

Ash door inlay options



Deer slate



Trail riders slate



Deer brushed stainless



TL2.6 with pedestal base



TL2.6 with legs



Optional cooking grill





Cover and left page: TL2.0 shown with optional modern brushed stainless door trim, brushed stainless air grille and trail riders slate inlay

This page: TL300 shown with optional leaf brushed stainless door trim and trail riders slate inlay



Modern brushed stainless trim (TL2.0 and TL2.6)



Leaf brushed stainless trim (TL300)




Top loading




Large ash pan



FireDome Plus Combustion System maximizes efficiency and extends burn times for up to 17 hours of even heat with each load of wood. Two combustion cycles completely burn the wood, smoke and exhaust. Visit HarmanStoves.com to learn more about the FireDome combustion system.

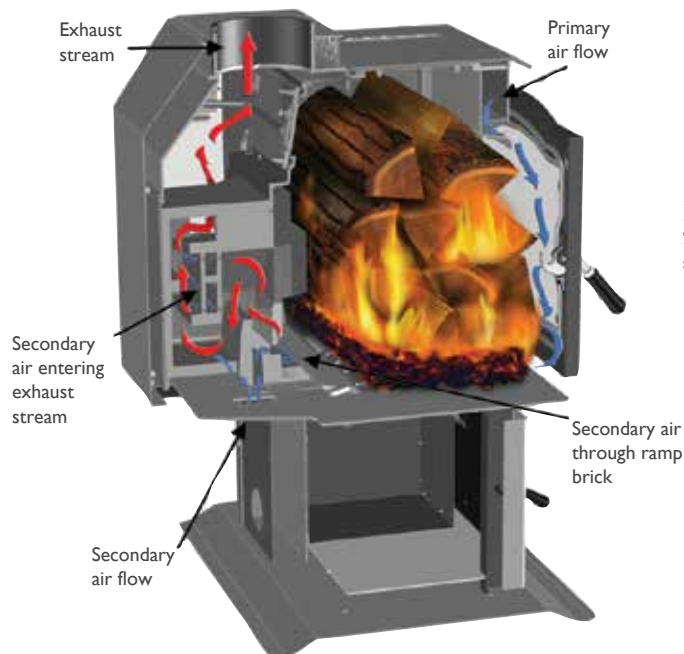

Typical Low Burn Rate Patterns for Three Basic Types of Wood-Burning Stoves

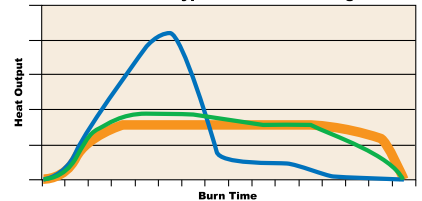

Type of Burn System

- Catalytic
- Non-Catalytic
- Harman FireDome Combustion System


TL-Series Specifications and Clearances

TL2.0 Wood Stove


EPA 1st Hour Peak BTUs.....	55,300
Heating Capacity ¹	1,200-3,100 sq ft
Optimum Efficiency ²	75.8%
Emissions.....	2.6 g/hr
Fuel.....	Wood
Firebox Capacity.....	2.0 cu ft
Log Length.....	18" max
Minimum Floor Protection ³ ...	32-1/2" x 48"




Front View



Side View



Floor protection: 32-1/2"W x 48"D




TL2.6 Wood Stove


EPA 1st Hour Peak BTUs.....	69,300
Heating Capacity ¹	1,400-3,200 sq ft
Optimum Efficiency ²	85.7%
Emissions.....	3.7 g/hr
Fuel.....	Wood
Firebox Capacity.....	2.6 cu ft
Log Length.....	18" max
Minimum Floor Protection ³ ...	32-1/2" x 50-7/16"




Front View/Pedestal





Front View/Legs




Side View/Pedestal



Side View/Legs



Floor protection: 32-1/2"W x 50-7/16"D




TL300 Wood Stove



EPA 1st Hour Peak BTUs.....	72,100
Heating Capacity ¹	1,600 - 4,300 sq ft
Optimum Efficiency ²	83.3%
Emissions.....	1.1 g/hr
Fuel.....	Wood
Firebox Capacity.....	3.0 cu ft
Log Length.....	20" max
Minimum Floor Protection ³ ...	32-5/8" x 51-7/16"




Front View



Side View



Floor protection: 32-5/8"W x 51-7/16"D



YOUR HARMAN DEALER IS:

HARMAN[®]
BUILT TO A STANDARD. NOT A PRICE

WWW.HARMANSTOVES.COM

facebook.com/HarmanStoves
twitter.com/HarmanStoves
youtube.com/HarmanStoves

HAR-1209U-0916

LIMITED LIFETIME WARRANTY⁴

The strongest in the industry, Harman provides a limited lifetime warranty on most important aspects: firebox and heat exchanger.

¹See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. ²Weighted Average LHV (Low Heating Value) Efficiency. ³Minimum size corner hearthpad will not touch the wall. Wall to stove clearances are priority. ⁴For full warranty details, visit www.harmanstoves.com.

Actual product appearance, including flame, may differ from image. Tested to: UL 1482-2011, UL 737-2011 and UL 5627-00 (TL2.0 and 2.6), UL 1482-2010, UL 737-2007 and UL 5627-00 (TL300). Product specifications and pricing subject to change without notice. The images and descriptions in this brochure are provided to assist you in product selection only. BTU values based on EPA testing standards. Typically, burning cord wood will result in higher BTU rating depending on moisture content. Refer to installation manual for complete clearance requirements and specifications. Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.harmanstoves.com/fireplacesafety