

A New Pellet Stove
In **3** Easy Steps




1 Choose your
Stove

2 Select your
Venting

3 Purchase your
Hearth Pad

Venting/Hearth Pad

Outside Air Kit

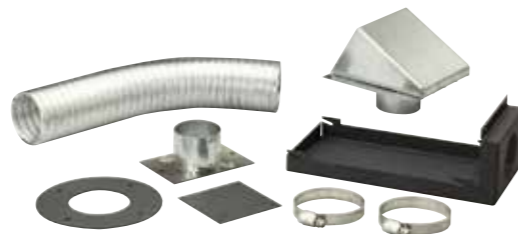

Required for all mobile and manufactured housing or if there is a question of negative pressures in the home. Just connect to the unit.

Rear vent with shield & clean out door



For best connects for no leak vent connections and quick and easy vent cleaning.

Short vent 90 degree with the clean out



For the situation of close encounters and quick and easy vent connections, with the same easy clean door.

Rear vent adapter with clean out door



Care-free vent connections with no leak worries and easy cleaning with vent clean out door.

Vent adaptor 3" - 4" offset



The standard 3-inch outlet from the unit can easily be adapted for 4-inch venting for your situation.

Top flue adaptor 3" - 6"



Connecting the standard 3-inch unit outlet to an existing 6-inch stove pipe will quickly connect and seal with no worries.

Hearth Pad



Hearth pads are designed to protect existing flooring and must be used when installing a stove onto combustible flooring.



Value & Dependability The Eco-Choice Advantage

Heatilator® Eco-Choice™ pellet stoves combine dependability and value from a brand you know and trust for hearth products. Featuring simple technology that's easy to operate and maintain, Heatilator Eco-Choice stoves provide clean and efficient heat. With a simple design plus quality you can see and feel, these freestanding stoves will deliver warmth and comfort in any room.

Save money while being green

Reduce your heating bills and live green by utilizing renewable fuels. Pellet fuel is the cleanest burning biomass fuel available.

Easy to use and maintain

Eco-Choice pellet stoves have large hoppers to hold plenty of fuel, include large ash pans and a fully-opening firepot bottom for easy maintenance.

It's a Heatilator

Manufactured in the USA, by the world's leading hearth company since 1927- known for value and dependability.



PS35 pellet-burning stove

- 12,900-34,000 BTU/hr Input¹
- 1,500-2,000 sq. ft. heating capacity²
- 78% efficient³
- Thermostat-controlled auto-ignition
- 1 bag hopper
- Mobile home approved

| PS35 Specifications | |
|--|------------|
| Width | 22-1/4" |
| Height | 31-3/4" |
| Depth | 24-13/16" |
| Weight | 210 lbs |
| Burn Rate | 4.1 lbs/hr |
| Hopper Capacity | 45 lbs |
| PS35 Clearances - Straight Back Against Wall | |
| Back Wall to Stove | 2" |
| Side Wall to Stove | 14" |
| PS35 Clearances - Corner Installation | |
| Walls to Stove | 2" |



PS50 pellet-burning stove

- 16,300-43,000 BTU/hr Input¹
- 1,800-2,500 sq. ft. heating capacity²
- 78% efficient³
- Thermostat-controlled auto-ignition
- 2 bag hopper
- Mobile home approved

| PS50 Specifications | |
|--|------------|
| Width | 24-1/4" |
| Height | 35-3/4" |
| Depth | 28-5/16" |
| Weight | 240 lbs |
| Burn Rate | 5.8 lbs/hr |
| Hopper Capacity | 80 lbs |
| PS50 Clearances - Straight Back Against Wall | |
| Back Wall to Stove | 2" |
| Side Wall to Stove | 14" |
| PS50 Clearances - Corner Installation | |
| Walls to Stove | 2" |



CAB50 pellet-burning stove

- 16,300-43,000 BTU/hr Input¹
- 1,800-2,500 sq. ft. heating capacity²
- 78% efficient³
- Thermostat-controlled auto-ignition
- 3 bag hopper
- Mobile home approved

| CAB50 Specifications | |
|---|------------|
| Width | 23-3/4" |
| Height | 36-1/2" |
| Depth | 25-7/8" |
| Weight | 266 lbs |
| Burn Rate | 5.8 lbs/hr |
| Hopper Capacity | 120 lbs |
| CAB50 Clearances - Straight Back Against Wall | |
| Back Wall to Stove | 2" |
| Side Wall to Stove | 14" |
| CAB50 Clearances - Corner Installation | |
| Walls to Stove | 2" |



heatilatorecochoice.com

youtube.com/heatilatorecochoice

Your Heatilator Eco-Choice dealer is:

Limited Warranty*

Heatilator Eco-Choice provides a 5 year warranty on the most important aspects: firebox and heat exchanger.

¹ Based on the maximum fee rate per hour multiplied by approximately 8600 BTUs, which is the average BTUs from a pound of pellets. ² See your local authorized Heatilator Eco-Choice dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. ³ EPA default efficiency. ⁴ For complete warranty details, see your Heatilator Eco-Choice dealer.

Refer to installation manual for detailed specifications on installing this product. Heatilator Eco-Choice reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Fuel density and pellet shape may affect hopper capacity.

Stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit: www.fireplaces.com/fireplace-safety

