






# QUADRA-FIRE

# PERFORMANCE FROM THE BEGINNING





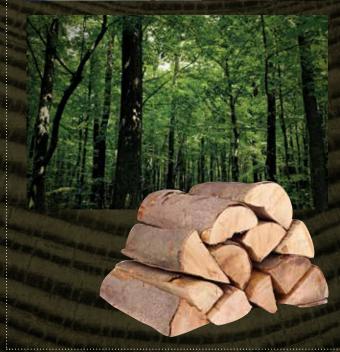

In 1990, the U.S. Environmental Protection Agency (EPA) enacted stringent wood-burning regulations, crippling the more than 500 wood stove manufacturers around the country. But not Quadra-Fire®.

Two years of research and development later, founders Alan Trusler and Dan Henry unveiled their patented "Quad Burn" system. The technology produced powerful and efficient rolling flames so intense, it dawned the inception of the Quadra-Fire name.

#### WHY QUADRA-FIRE

For more than 30 years, Quadra-Fire has put performance and easy operation above all else. Today these ideals are vibrant and alive, blending our past with our present. Quadra-Fire products are proudly built to last by our members.

### WHY WOOD

IT'S RENEWABLE - Using renewable energy sources is more important than ever and wood is 100 percent renewable. When you burn wood, you are also completing the last step of the natural carbon cycle of trees, resulting in a zero net carbon impact on the environment.

IT'S COST-EFFECTIVE - Heating with wood costs less than heating with electricity, liquid propane or heating oil, especially if you harvest wood yourself.

As the fire ignites, it remains clear:

NOTHING BURNS LIKE A QUAD.

COVER: EXPLORER II IN PORCELAIN MAHOGANY

# CAST WOOD STOVES PERFORMANCE NEVER LOOKED SO GOOD.

Powerful and efficient, Quadra-Fire cast iron wood stoves are the most durable products in the category. They're built to last with a solid steel welded firebox.

## PERFORMANCE

 Get maximum heat and a clean burn with the Quadra-Fire Four-Point Burn System, delivering performance that you can see

### **EASY OPERATION**


- Eliminate the hassle and save time with Automatic Combustion Control (ACC): simply load the wood, light the fire and walk away
- Quick and easy cleaning with the Quadra-Fire Ash Removal System (ARS)



EXCLUSIVE TECHNOLOGIES Innovative technology is at work in every Quadra-Fire. These advancements make it possible to burn wood more effectively, efficiently, and with more control.

#### FOUR-POINT BURN SYSTEM

The patented Quadra-Fire Four-Point Burn System produces intense rolling flames. Four combustion cycles extend the heat, enhance the fire and increase efficiency for long-lasting, proven performance.



# 1. PRECISION START-UP Airflow quickly routes to the heart of the fire.

#### 2. SECONDARY BURN ZONE Air movement helps create rolling flames and keeps the glass clean.

# 3. TERTIARY BURN ZONE Superheated air ignites flammable gases rising from the wood.

**4. QUATERNARY BURN ZONE** Remaining impurities are burned above the baffle before exiting up the chimney.

## **AUTOMATIC COMBUSTION CONTROL**

Automatic Combustion Control (ACC) is an advanced heat management technology from Quadra-Fire. ACC feeds the fire with air when it's needed most—for precision startup and consistent, extended burns.



# A. ACTIVATION CONTROL KNOB

Push back and pull forward to activate startup airflow.

#### **B. ACC AIR INLET**

Controls startup airflow to build the fire.

#### C. ACC TIMER

Opens ACC air inlet during startup for approximately 20 minutes.

**D. BURN RATE CONTROL** Controls the airflow feeding the fire, also controls your comfort.















EXPLORER III » PORCELAIN MAHOGANY

PORCELAIN BLACK

PORCELAIN FROST PORCELAIN DARK BLUE CLASSIC BLACK















EXPLORER II » PORCELAIN MAHOGANY

PORCELAIN BLACK PORCELAIN DARK BLUE PORCELAIN FROST

CLASSIC BLACK















EXPLORER I » PORCELAIN FROST

PORCELAIN BLACK PORCELAIN MAHOGANY PORCELAIN DARK BLUE

CLASSIC BLACK

# **ACCESSORIES**







EXPLORER III / EXPLORER II / EXPLORER I

# **QUADRA-FIRE**

# STOVE COMPARISON

STOVE COMITANTSON	EXPLORER II  EXPLORER II  EXPLORER I  28-3/4  29-19-1/2  28-15/16  28-15/16  28-15/16  28-15/16  28-15/16  PEAK BTU/HR OUTPUT¹  PEAK BTU/HR OUTPUT¹  PEAK BTU/HR OUTPUT¹					
EXPLORER III	EXPLORER II	EXPLORER I				
31-3/8	28-15/16 28-15/16 28-15/16	28-9/16				
<b>PEAK BTU/HR OUTPUT</b> <sup>1</sup> » 70,300	<b>PEAK BTU/HR OUTPUT</b> <sup>1</sup>	<b>PEAK BTU/HR OUTPUT</b> <sup>1</sup>				
HEATING CAPACITY <sup>2</sup>	HEATING CAPACITY <sup>2</sup>	HEATING CAPACITY <sup>2</sup>				

» 1,500 - 4,000 sq ft

#### **MAXIMUM BURN TIME**<sup>3</sup>

» 15 hrs

### **EFFICIENCY**<sup>4</sup>

» 74.4%

### **EMISSIONS**

» 2.0 g/hr

#### FIREBOX CAPACITY

» 3.0 cu ft

#### RECOMMENDED LOG LENGTH

» 22" maximum

## **VIEWING AREA**

» 286 sq in

### **ACTUAL WEIGHT**

» 545lb

#### **TECHNOLOGIES**

» ACC, Four-Point Burn

» 1,300 - 3,400 sq ft

#### **MAXIMUM BURN TIME**<sup>3</sup>

» 12 hrs

#### **EFFICIENCY**<sup>4</sup>

» 78.3%

### **EMISSIONS**

» 2.2 g/hr

#### FIREBOX CAPACITY

» 2.4 cu ft

#### RECOMMENDED LOG LENGTH

» 20" maximum

### **VIEWING AREA**

» 234 sq in

### **ACTUAL WEIGHT**

» 460lb

## **TECHNOLOGIES**

» ACC, Four-Point Burn

» 1,100 - 2,900 sq ft

#### **MAXIMUM BURN TIME3**

»8 hrs

#### **EFFICIENCY**<sup>4</sup>

» 80.1%

#### **EMISSIONS**

» 2.2 g/hr

#### FIREBOX CAPACITY

» 1.7 cu ft

#### RECOMMENDED LOG LENGTH

» 16" maximum

### **VIEWING AREA**

» 191 sq in

## **ACTUAL WEIGHT**


**≫** 371lb

#### **TECHNOLOGIES**


» ACC, Four-Point Burn

CLEARANCES TO COMBUSTIBLES											
STEP TOP SERIES		Full Vertical									
SIEPIO	STEP TOP SERIES		В	С	D	Е	F	G			
FIIII	Single Wall Pipe	10-1/2"	7"	27"	12"	7"	18"	52-1/2"			
Explorer III	Double Wall Pipe	9-1/2"	6"	27"	12"	5"	16"	52-1/2"			
Fueless II	Single Wall Pipe	10-1/2"	6-1/2"	20-1/4"	6-1/2"	7"	17-1/4"	55"			
Explorer II	Double Wall Pipe	9-3/8"	5-3/8"	20-1/4"	6-1/2"	4-1/2"	14-3/4"	55"			
	Single Wall Pipe	17"	12-1/2"	24"	11"	7-1/2"	18"	53-1/2"			
Explorer I	Double Wall Pipe	13-1/2"	9"	23"	10"	3"	13-1/4"	53-1/2"			


#### Backwall / Sidewall



#### Corner Installation




#### Stove to Ceiling Clearance




HEARTH PROTECTION												
	Hearth Pad	Α	В	С	D	E	F	G	Н	I	J	K
Explorer III	Type II*	8"	16"	35-3/8"	39-3/8"	49-3/4"	19-1/8"	36-1/4"	60-7/8	47-1/4"	33-3/4"	57-1/4"
Explorer II	Type I	8"	16"	35-1/4"	35-5/8"	48"	19-1/4"	34-3/8"	58-1/4"	45-1/2"	31-7/8"	54-5/8"
Explorer I	Type II*	8"	16"	33"	38-1/2"	47-1/8"	17-3/4"	34-3/4"	58"	42-1/2"	30"	51-1/4"

#### Standard Dimensions




\*Type II hearthpad requires a minimum R-value of 1.06.

#### **Corner Dimensions** w/Single Wall Pipe



#### **Corner Dimensions** w/Double Wall Pipe,





Thank You From Everyone At Quadra-Fire



www.quadrafire.com | 800-926-4356

facebook.com/QuadraFire stwitter.com/QuadraFire syoutube.com/QuadraFirePower

#### Available From:

# Limited Lifetime Warranty<sup>5</sup>

The strongest in the industry, Quadra-Fire provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

1: BTU: 1st hour output uses high burn efficiency number. BTU will vary depending on the type of fuel used and moisture content of the fuel. 2: Heating capacity (in square feet) is a guideline only and may differ due to climate, building construction and condition, amount and quality of insulation, location of the heater, and air movement in the room. 3: Actual burn times will vary based on how the appliance is operated, load size, moisture content and type of wood used, chimney height and installation 4: Weighted average (Low Heating Value) LHV efficiency. 5: For full warranty details go to www.quadrafire.com.

IMPORTANT - READ BEFORE YOU INSTALL! - Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions in this brochure are provided to assist you in product selection only. Quadra-Fire is a registered trademark of Hearth & Home Technologies. Product specifications and pricing subject to change without notice. Fireplace, stove and insert surfaces get extremely HOT and can cause burns if touched. Keep a safe distance away. To learn more visit www.quadrafire.com/fireplacesafety.